


**Geberit mechanism type 290-380, dual flush, universal water supply connection, 3/8", nipple made of brass**



Example image

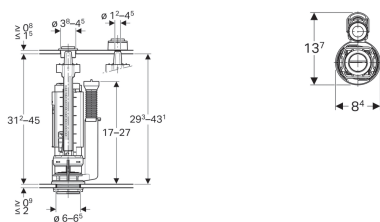

**Application purposes**

- For greywater (rainwater) with pH value 6.0–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 3/8"

**Characteristics**

- Dual flush
- Adjustable filling height
- Threaded nipple made of brass
- Height-adjustable
- Small and large flush volume can be set depending on the amount of water in the cistern
- Overflow pipe height-adjustable
- Water supply connection on the left/right

- Water supply connection on the bottom
- With lid attachment
- Suitable for basket, for flush valve type 280
- Suitable for basket, for flush valve type 250 (Twico 1)

**Technical data**

Flow pressure	0.1-10 bar
Line noise at 3 bar	12 dB(A)
Line noise at 5 bar	18 dB(A)
Maximum storage temperature	40 °C
Maximum operating temperature, water	25 °C
Actuation force	18 N

**Scope of delivery**

- Fastening material

Art. no.	Surface / colour
283.354.21.2	gloss chrome-plated